


### MAIN FEATURES

- 1/2.7" 2.1 Megapixel Progressive CMOS
- HD-TVI @ 1080P (1920 x 1080)
- 30m IR (32pcs IR LED)
- 3.6mm Lens, True D&N (ICR)
- 2D & 3D DNR, Defog
- 3 Axis Bracket
- DC 12V, IP68

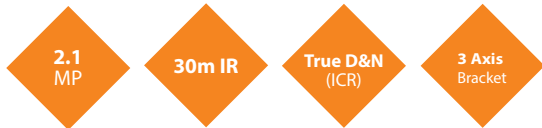

MODEL	SRTVI-VD37
Signal Format	NTSC/PAL
Image Sensor	1/2.7" INCH CMOS SENSOR
Effective Pixels	1930(H) x 1088(V) = 2.09M (Pixel)
Scanning System	Progressive Scan
Video Output	TVI : 1920 x1080p(1080p/25,30fps)
Min. Illumination	Color : 1.0 lux, BW : 0.5lux
S/N Ratio	More than 50dB (AGC off)
Backlight Compensation	ON / OFF
White Balance	ATW
2D	OFF / LOW / MIDDLE / HIGH
Day & Night	AUTO/ CDS / COLOR / B&W (ICR)
Motion Detection	ON / OFF
Privacy Masking	ON(2 Point) / OFF
Lens	Fixed Lens 3.6mm
Resolution	TVI : 1920 x1080p(1080p/25,30fps)
SHUTTER	AUTO / MANUAL (1/30(25)~1/6000)
AGC	ON / OFF (1 ~ 5)
MIRROR	OFF / H / V / HV
FRAME RATE	1080P - 25FPS / 30FPS
Video Output ( TVI )	Connector
Power Supply	DC 12V ±10%
Operating Temperature	-10°C ~ +50°C
Dimension	150.56(Ø) x108.10(H)mm
Weight	Approx. 820g

### OPTIONAL





SRTVI-VDVFBB | Base Bracket



SRTVI-VDVFWB | Wall Bracket

### DIMENSIONS



\* Specifications subject to change without notice